


PAVING STONE

REF: CS_COM_Paver_Flush_to_Concrete_Curb

CROSS SECTION

Pavers on Granular Base w/ Flush Concrete Curb

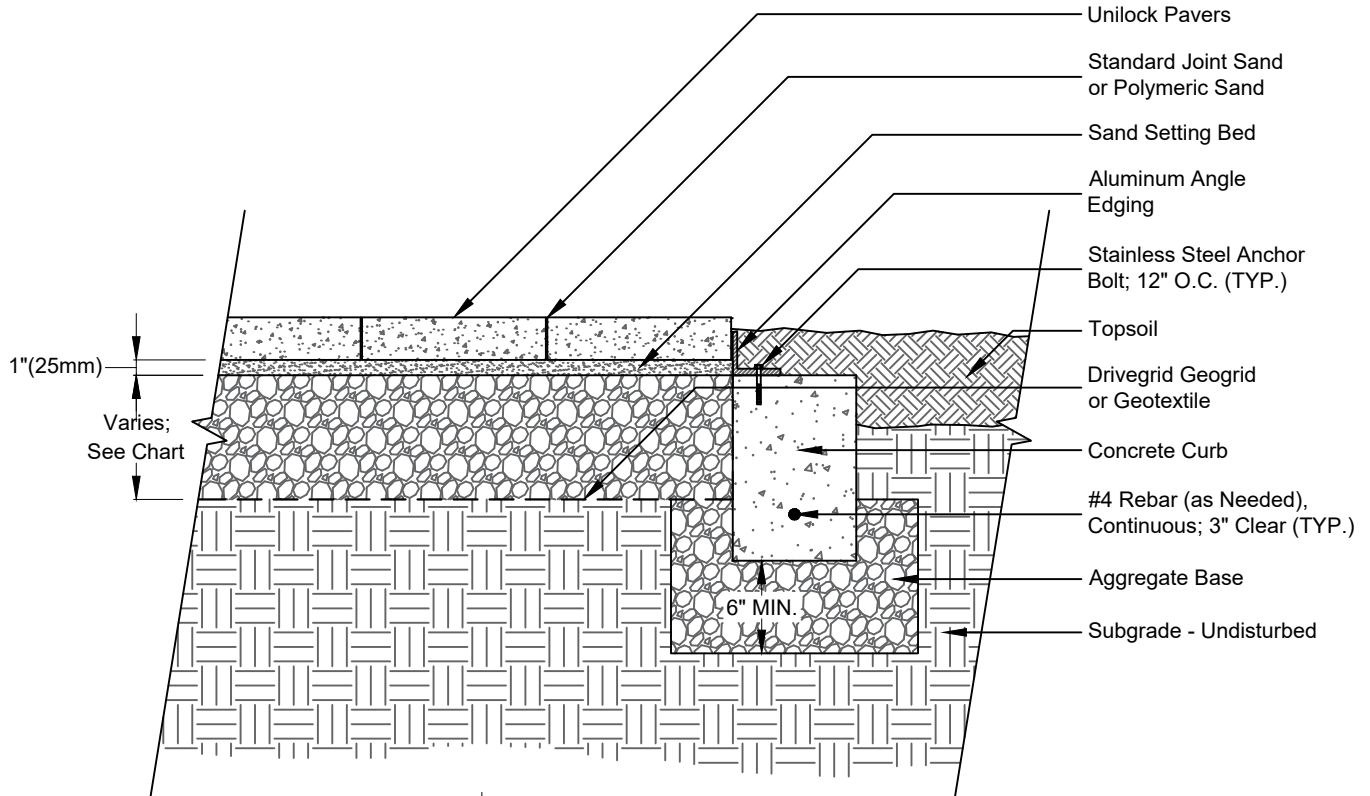

Commercial Use	Minimum Base Thickness
Sidewalk	6"(100mm)
Plaza	8"(200mm)
Other	Contact Unilock

Note:

This cross section is intended for preliminary design purposes only. Confirm site conditions and consult with a qualified design professional or installer prior to installation.

