
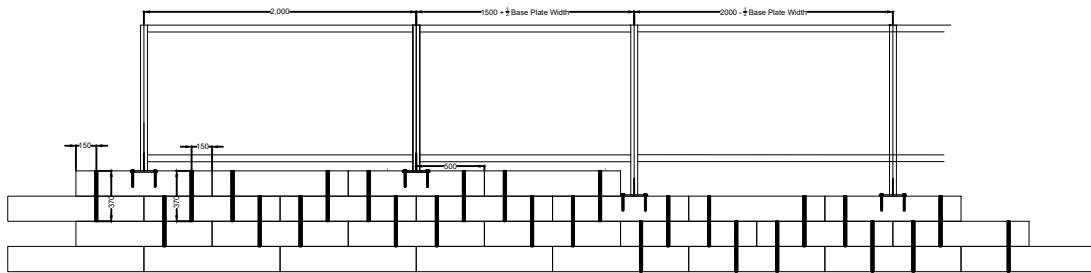


SIENA STONE[®]

REF: Detail_SienaStone_Flush Mounted Pedestrian Railing 1

FLUSH MOUNTED PEDESTRIAN GUARD 1000MM STANDARD UNIT

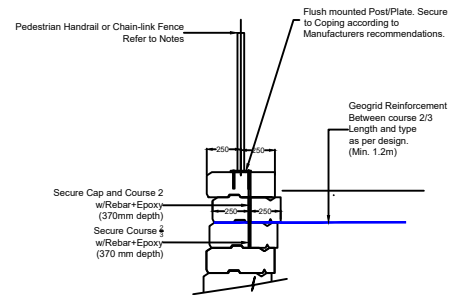

Typical Elevation View

Notes:

1. Pedestrian Guard/Handrail must be non-wind bearing.
2. Base Plate flush mounted as shown. Secure to Coping in accordance with Manufacturers recommendations with suitable concrete anchors.
3. Base Plate to be mounted in center of Coping Block (front to back). Offset to Block ends as shown in Elevation.
4. Rebar to be 15M w/Epcon A7 Epoxy. Install in accordance with Manufacturers recommendations.
5. Rebar dowels placed at center of 2nd/3rd Block (Front to back and side to side) as shown below.



Engineering design by RisiStone Inc.

UNILOCK.COM | 1-800-UNILOCK

UNILOCK[®]
PAVERS & WALLS